


# INTERFACE CUSTOM DESIGNS


## Interface Model 1550—Low Profile

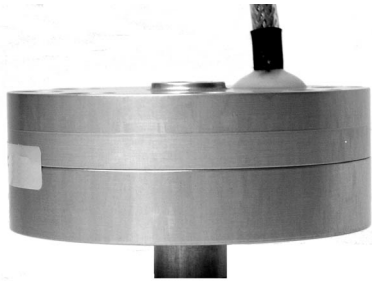

- Test machine application
- Compact size
- Good for high accuracy measurement where space is limited
- Capacities 25, 50, 100, 200 lbf

### SPECIFICATIONS

Rated Output	2.0 mV/V
Nonlinearity %FS	±0.30
Hysteresis %FS	±0.05
Nonrepeatability %FS	±0.02

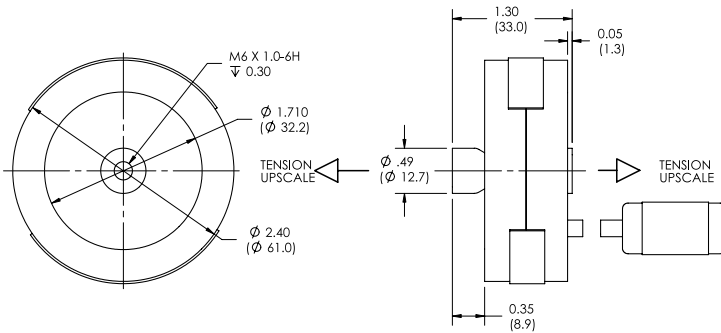

## Interface Model LP—Loadpin



- Designed to replace pins or bolts that carry a load
- Stainless Steel construction
- Capable of 100% humidity, 30G mechanical shock and 5G vibration
- Used with Clevises, or pulley shafts to monitor loads
- Capacity 1740 lbf

### SPECIFICATIONS

Rated Output	1.6 mV/V
Nonlinearity %FS	±0.50
Hysteresis %FS	±0.50
Nonrepeatability %FS	±0.25

