

Model SMT S-Type Overload Protected Load Cell (U.S. & Metric)



Why the Interface model SMT S-Type Overload Protected Load Cell is the best in class:

- Proprietary Interface temperature compensated strain gages
- Overload protected in both tension and compression
- Safe overload to 10X capacity
- High performance
- Low creep
- 1 to 450 lbf

STANDARD CONFIGURATION

5 ft Integral Cable

OPTIONS

Alternate Cable Length
Standardized Output

ACCESSORIES

Instrumentation
Mounting Hardware

Consult factory for more technical information

SPECIFICATIONS

ACCURACY – (MAX ERROR)

Nonlinearity-% FS	±0.05
Hysteresis-% FS	±0.03
Nonrepeatability-% RO	±0.02
Creep, in 20 min-%	±0.025

TEMPERATURE

Compensated Range-°F	0 to 125
Compensated Range-°C	-15 to 50
Operating Range-°F	-10 to 175
Operating Range-°C	-25 to 80
Effect on Output-%/°F – MAX	±0.0010
Effect on Output-%/°C – MAX	±0.0018
Effect on Zero-% RO/°F – MAX	±0.0015
Effect on Zero-% RO/°C – MAX	±0.0027

ELECTRICAL


Rated Output-mV/V (Nominal)	2.0
Zero Balance-% RO	±3.0
Bridge Resistance-Ohm (Nominal)	350
Excitation Voltage – MAX	15 VDC
Insulation Resistance-Megohm	> 5000

MECHANICAL

Calibration	T & C
Safe Overload-% CAP (1.1, 2.2, 5.6, 11, 22, 56)	1000 (112, 225, 450) 500
Cable length-ft	5

Natural Frequency/Deflection:

lbf	N	Deflection (inches)	Nat. Freq. (Hertz)
1.1	5	.014	100
2.2	10	.012	160
5.6	25	.011	260
11	50	.009	380
22	100	.007	600
56	250	.006	900
112	500	.007	600
225	1000	.007	1200
450	2000	.007	1500

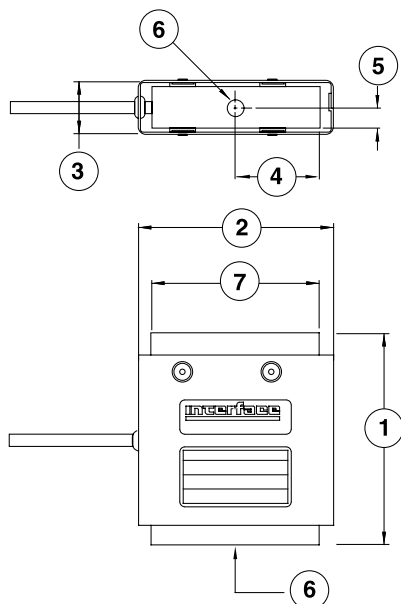

DIMENSIONS

See Drawing	CAPACITY			
	SMT1		SMT2	
	U.S. (lbf)	Metric (N)	U.S. (lbf)	Metric (N)
	inch	mm	inch	mm
①	1.1, 2.2, 5.6, 11, 22, 56	5, 10, 25, 50, 100, 250	112, 225, 450	500, 1000, 2000
②	2.48	63.0	2.98	75.7
③	0.65	16.5	1.15	29.2
④	0.98	24.9	0.98	24.9
⑤	0.24	6.1	0.49	12.4
⑥	1/4-28 UNF-3B 0.31 deep	M6 x 1-6H 8.0 deep	1/2-20 UNF-3B 0.57 deep	M12 x 1.75-6H 14.5 deep
⑦	1.96	49.8	1.96	49.8